

SMART HOSE FAUCET TIMER

IMPORTANT PLEASE READ!



WHEN EXPECTING FREEZING TEMPERATURES, TIMERS SHOULD BE REMOVED FROM THE HOSE FAUCET AND STORED INDOORS TO AVOID POTENTIAL FREEZE DAMAGE.




FILTER TRAPS DIRT PARTICLES, PROLONGING LIFE OF TIMER. CLEAN FILTER REGULARLY AND REPLACE IF WORN.

Congratulations on purchasing this Smart Hose Faucet Timer from Orbit®. This timer is designed to work with the Lowe's Iris® home management system (Iris® Smart Hub required). Once connected to Iris, you can program, operate, and monitor your timer from anywhere using your smart phone, tablet, or computer. Learn more by visiting www.lowes.com/iris. Follow the Connect Timer to Iris®

Home Management System section to pair your device with your Iris® system. This timer can also be used as a standalone water timer without connecting to Iris. See the Manual Timer Operation without Iris® section.

TIMER FEATURES

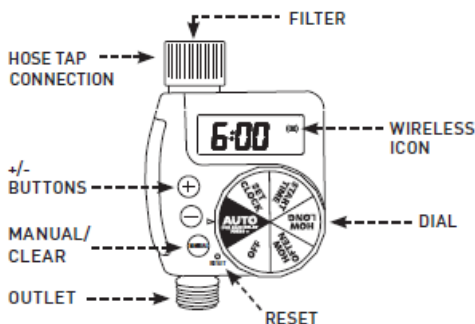

DIAL—Rotate the dial to customize your watering schedule

RESET—Press to clear all programming

MANUAL/CLEAR—Press to water manually or to clear programming within a specific program

+/- BUTTONS—Use these buttons to adjust time and system setup



AUTO—Timer waters according to your customized schedule

SET CLOCK—Set the time of day

START TIME—Select what time you would like watering to start

HOW LONG—Determine how long to water

HOW OFTEN—Choose how often you will water

OFF—Turn off all watering

CONNECT TIMER TO IRIS® HOME MANAGEMENT SYSTEM

1. Log into your Iris® account at www.lowes.com/iris using a computer. Follow the instructions in the "Add Device" section of the Iris® website.
2. Slide out the battery tray on the back of the timer.

3. Insert two AA (1.5V) alkaline batteries (not included) and replace the tray.

NOTE: Firmly replace the battery tray to ensure water resistance and increase battery life. You will know the battery tray is fully inserted if it does not pull out easily. Used up or dead batteries must be removed from the timer and disposed of properly. Batteries should be removed from the timer at the end of the watering season and replaced with new ones at the beginning of the next watering season. Replace batteries when low battery icon appears on display.

4. Turn the dial to AUTO.

5. When batteries are inserted, the timer will automatically attempt to connect to Iris® and the wireless icon on screen will begin to flash.



NOTE: Timer will remain in pairing mode for 10 minutes or until paired. If pairing is not successful after 10 minutes, the timer will stop trying to pair. To enter pairing mode again press the RESET button 5 times in rapid succession. For help contact Iris® at 1.855.469.IRIS or www.lowes.com/iris.

6. The wireless icon will flash three times and stay solid to confirm pairing is complete.
7. You can now control your hose faucet timer using the Iris® website and mobile applications.
8. To stop all watering turn the dial to OFF. While dial is turned to OFF you will NOT be able to manually water or control and monitor your timer from any smart device.

TESTING COMMUNICATION WITH IRIS®

Testing a timer's communication with Iris® will identify a specific timer and test that a timer is correctly connected to Iris®.

1. To initiate test mode, select the device on the Iris® website and click "Test". The word "test" will appear on the timer screen until leaving test mode.



REMOVE TIMER FROM IRIS®

If you do not pair or you un-pair the timer you may still operate the timer manually. (see "MANUAL TIMER OPERATION WITHOUT IRIS®"). Without Iris®, you will NOT be able to control and monitor your timer from any smart device or have the additional functions and features available through the Iris® website.

1. Log into your Iris® account at www.lowes.com/iris using a computer.
2. Select the timer on the Iris® website and click "Remove". Alternatively if you want to manually un-pair the timer press the RESET button 5 times in rapid succession.

MANUAL TIMER OPERATION WITHOUT IRIS®

The manual operation of the timer is disabled when paired to Iris®. To operate the timer manually un-pair the timer from Iris® (see REMOVE TIMER FROM IRIS® section).

INSTALLING THE BATTERIES

1. Remove the tray on the back of the timer by sliding or pulling it out.
2. Insert two AA (1.5V) alkaline batteries (not included) and replace the tray.

NOTE: Firmly replace the battery tray to ensure water resistance and increase battery life. You will know the battery tray is fully inserted if it does not pull out easily. Used up or dead batteries must be removed from the timer and disposed of properly. Batteries should be removed from the timer at the end of the watering season and replaced with new ones at the beginning of the next watering season. Replace batteries when low battery icon appears on display.

